

# Development of a Node-positioning Algorithm for Wireless Sensor Networks in 3D Space

Ruslan Kirichek\*, Ilya Grishin\*, Darina Okuneva\*, Michail Falin\*\*

\*Department of Telecommunication Networks and Data Transmission, St.Petersburg State University of Telecommunication, Russia

\*\*St.Petersburg National Research University of Information Technologies, Mechanics and Optics, Russia  
kirichek@sut.ru, msp\_sut@list.ru, darina\_okuneva@mail.ru, kalle.falin@gmail.com

**Abstract**— Wireless sensor networks are finding increasing application in various areas of our lives. Typically, the sensor network is important not only to detect or measure the value of an event parameter of interest, but also to correlate it to a specific point in space. As the location of sensors on the ground can be random in nature, there is a question of finding the coordinates of all nodes. Thus, the problem solved in the article has both theoretical and practical value that is extremely important. The algorithm of determining locations of sensor network nodes in three-dimensional space is described in the article.

**Keywords**— Wireless sensor network, 3D space, node-positioning

## I. INTRODUCTION

A wireless sensor network (WSN) is a collection of sensors and actuators communicating with each other through the wireless links. The availability of redundant paths between nodes provides high reliability and self-healing of the network in case of failure.

Today, WSNs are used for a wide range of purposes, such as environment control and monitoring, natural disaster alerting, performing perimeter surveillance.

To accomplish these tasks, the actual node positions should be known. Sometimes, especially in rural and hard-to-reach areas (woodlands, mountain terrain, etc.), the placement of nodes is random rather than perfectly controlled. Therefore, sensor positioning, taking into account the topography of the terrain (i.e., 3-dimensional space), is a crucial issue in WSN operation and management.

There are many investigation papers in the WSN area. The cluster head selection algorithms are the one of the most popular investigation areas on the WSN. The cluster head selection algorithms to the WSN with fixed sensor nodes were developed in the [1,2]. The papers [3,4,5] have extended this results to WSN with mobile sensor nodes. The cluster head selection algorithms to 3D WSN were proposed in the [6,7,8]. The special investigation topic on the WSN with temporary cluster head nodes was considered in the [9]. The FUSN (Flying Ubiquitous Sensor Networks) was investigated in [10, 11]. The localization of sensor nodes in 3D space

investigation process is opened now [12], but various research issues are still unsolved in this field.

## II. DESCRIPTION OF THE SUBJECT AREA

Let us consider a WSN with an irregular topology consisting of a number of nodes  $Y_n$ ,  $n=1...N$ , whose coordinates in 3D space  $[x_n \ y_n \ z_n]$  are unknown. At the first stage of development of the algorithm, let us assume that there are redundant paths between nodes and all transmissions are performed under the idealized conditions.

In this case, the distance  $d_{mn}$  between nodes  $Y_n$  and  $Y_m$  can be found using the Friis transmission equation:

$$d_{mn} = \frac{\lambda}{4\pi} \sqrt{\frac{P_{tm} G_t G_r}{P_{rn}}}, \quad (1)$$

where  $P_{tm}$  is the output power to the transmitting antenna of the  $m$ -th node (W);

$P_{rn}$  is the power available at the input of the receiving antenna of the  $n$ -th node (W);

$G_t$  is the transmitting antenna gain;

$G_r$  is the receiving antenna gain;

$\lambda$  is the wavelength (m).

The distance  $d_{mn}$  can be also obtained as

$$d_{mn} = |Y_m Y_n| = \sqrt{(x_m - x_n)^2 + (y_m - y_n)^2 + (z_m - z_n)^2}, \quad (2)$$

where  $x_m, x_n, y_m, y_n, z_m, z_n$  are the coordinates of nodes  $Y_m$  and  $Y_n$ .

In  $K$ -dimensional space, the vector of coordinates of any node  $Y_n$  can be defined as a linear combination of  $K$  known and linearly independent vectors  $Y_k, k=1...K, k \neq n$ :

$$Y_n = \sum_{k=1}^K \alpha_k Y_k. \quad (3)$$

Thus, in order to determine the position coordinates of any node, it is enough to know the position coordinates of 3 neighboring nodes, which results in finding coordinates of the tetrahedron vertices.

### III. ALGORITHM DEVELOPMENT

At the first stage of determination of node positions, let us assume that there are 3 nodes  $V_1, V_2, V_3$ , whose coordinates are known (Figure 1a). These nodes are located in radio range of each other. Node  $V_4$  with unknown coordinates is also in radio range of nodes  $V_1, V_2, V_3$ .

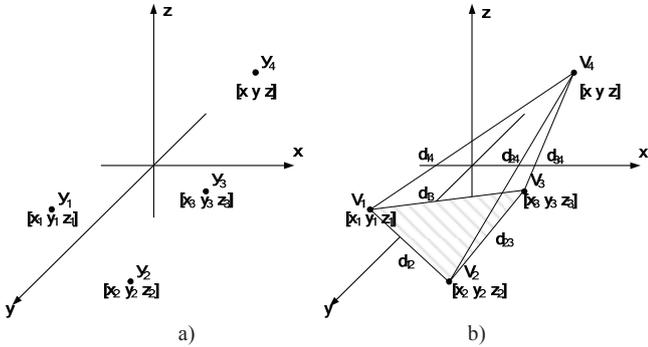


Figure 1. a) node placement in 3D space; b) construction of a tetrahedron with sensor nodes at the vertices

Consider a tetrahedron, which vertices  $V_1... V_4$  have the same coordinates as nodes  $V_1... V_4$ , respectively. Let us denote the vectors specifying coordinates of the tetrahedron vertices in 3D space as  $\mathbf{V}_k$ .

The length of tetrahedron edges connecting vertices  $V_1... V_4$ , can be found as (2). Taking into account the previously introduced assumptions, we can suppose that the length of the tetrahedron edges between vertices  $V_1... V_4$ , computed according to (2), matches the distance  $d_{mn}$ , which can be calculated according to (1).

To simplify determination of the coordinates of vertex  $V_4$ , let us introduce a new coordinate system using shift (Figure 2a) and rotation (Figure 2b) of the original one:

$$\text{shift } \mathbf{W}_k = [x'_k \ y'_k \ z'_k] = \mathbf{V}_k - \mathbf{V}_1; \quad (4)$$

$$\text{rotation } \mathbf{Y}_k = [U_k \ V_k \ W_k] = [x'_k \ y'_k \ z'_k] = \mathbf{W}_k \mathbf{R} \quad (5)$$

where  $\mathbf{R}$  is a rotation matrix of the coordinate system.

The rotation matrix  $\mathbf{R}$  enables to transform vector  $\overline{V_1 V_2}$  to lie along one of the coordinate axes  $d_{12}$ :

transform  $\overline{V_1 V_2}$  to lie along the X-axis

$$\begin{bmatrix} d_{12} & 0 & 0 \end{bmatrix}; \mathbf{R} = \mathbf{R}_{X1} \mathbf{R}_{Z2};$$

transform  $\overline{V_1 V_2}$  to lie along the Y-axis

$$\begin{bmatrix} 0 & d_{12} & 0 \end{bmatrix}; \mathbf{R} = \mathbf{R}_{Y1} \mathbf{R}_{X2};$$

transform  $\overline{V_1 V_2}$  to lie along the Z-axis

$$\begin{bmatrix} 0 & 0 & d_{12} \end{bmatrix}; \mathbf{R} = \mathbf{R}_{Z1} \mathbf{R}_{Y2}.$$

The positions of the other tetrahedron vertices will be defined by coordinates  $[U_k \ V_k \ W_k]$ .

Here the rotation matrices along with one of the coordinate axes are given as:

$$\mathbf{R}_{X_i} = \begin{bmatrix} 1 & 0 & 0 \\ 0 & \cos\alpha_i & -\sin\alpha_i \\ 0 & \sin\alpha_i & \cos\alpha_i \end{bmatrix}, \mathbf{R}_{Y_i} = \begin{bmatrix} \cos\beta_i & 0 & \sin\beta_i \\ 0 & 1 & 0 \\ -\sin\beta_i & 0 & \cos\beta_i \end{bmatrix}, \mathbf{R}_{Z_i} = \begin{bmatrix} \cos\gamma_i & -\sin\gamma_i & 0 \\ \sin\gamma_i & \cos\gamma_i & 0 \\ 0 & 0 & 1 \end{bmatrix},$$

where  $i=1,2$ .

Eulerian angles  $\alpha_i, \beta_i$  and  $\gamma_i$  are given as:

$$\alpha_i = \arcsin\left(\frac{Z_i}{\sqrt{Y_i^2 + Z_i^2}}\right), \beta_i = \arcsin\left(\frac{X_i}{\sqrt{X_i^2 + Z_i^2}}\right), \gamma_i = \arcsin\left(\frac{Z_i}{\sqrt{Y_i^2 + Z_i^2}}\right),$$

where  $X_1, Y_1, Z_1$  are coordinates  $x''_2, y''_2, z''_2$  of  $V_2$ , obtained as a result of the shift;

$X_2, Y_2, Z_2$  are coordinates  $x'_2, y'_2, z'_2$  of  $V_2$ , obtained as a result of multiplying  $[x''_2 \ y''_2 \ z''_2]$  by  $\mathbf{R}_{X(Y,Z)1}$ .

Consider the case of changing coordinate systems with  $\mathbf{R} = \mathbf{R}_{Z1} \mathbf{R}_{Y2}$ . This transformation results in new coordinates of the tetrahedron vertices:  $[0, 0, 0]$  for  $V_1$ ,  $[0 \ 0 \ d_{12}]$  for  $V_2$ ,  $[U_3 \ V_3 \ W_3]$  for  $V_3$ . The coordinates of vertex  $V_4$  are given as  $[U_4 \ V_4 \ W_4]$ . Let us denote  $[U_4 \ V_4 \ W_4]$  as  $[A \ B \ C]$ .

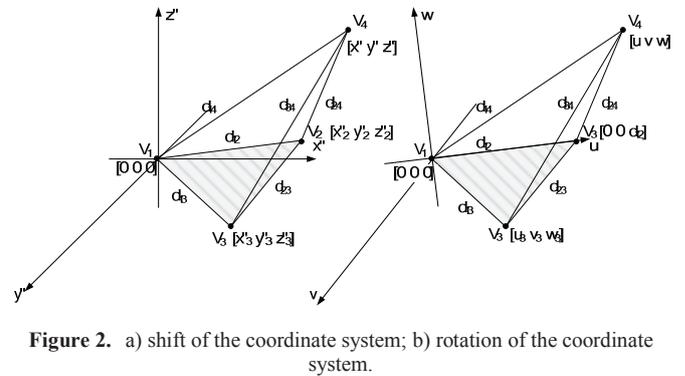


Figure 2. a) shift of the coordinate system; b) rotation of the coordinate system.

Hence, squares of the edge lengths between vertices  $V_1... V_3$  and vertex  $V_4$  are defined by the system of equations:

$$\begin{cases} d_{14}^2 = A^2 + B^2 + C^2 \\ d_{24}^2 = A^2 + B^2 + (C - d_{12})^2 \\ d_{34}^2 = (A - U_3)^2 + (B - V_3)^2 + (C - W_3)^2 \end{cases} \quad (6)$$

Let us find the difference of squares between the edge lengths of the tetrahedron:

$$\begin{cases} d_{14}^2 - d_{24}^2 = 2 \cdot C \cdot d_{12} - d_{12}^2 \\ d_{24}^2 - d_{34}^2 = 2AU_3 - U_3^2 + 2BV_3 - V_3^2 + d_{12}^2 - 2Cd_{12} + 2CW_3 - W_3^2 \\ d_{34}^2 - d_{14}^2 = (A - U_3)^2 + (B - V_3)^2 + (C - W_3)^2 - A^2 - B^2 - C^2 \end{cases} \quad (7)$$

Taking into account that the coordinates of vertices  $V_1... V_3$  are known, we can uniquely determine one of the coordinates of vertex  $V_4$  (in this case, it is C):

$$C = \frac{d_{12}^2 + d_{14}^2 - d_{24}^2}{2d_{12}} = W_4, \quad (8)$$

Substituting the obtained coordinate  $W_4$  into either one of the remaining equations,  $d_{24}^2 - d_{34}^2$  or  $d_{34}^2 - d_{14}^2$ , enables to define the relation between coordinates  $A$  and  $B$ :  $B=kA+l$ , where

$$k = \frac{U_3}{V_3}; \quad l = \frac{U_3^2 + V_3^2 + d_{14}^2 - d_{34}^2 + (W_4 - W_3)^2 - W_4^2}{2V_3} \quad (9)$$

Substitution of  $B$  and  $C$  in equation  $d_{14}^2 - d_{24}^2$  yields  $d_{14}^2 = aA^2 + bA + c$ , the roots of which correspond to 2 possible coordinates of  $V_4$  along the  $u$ -axis ( $U_{41}$  and  $U_{42}$ ) and, consequently, 2 possible coordinates along the  $v$ -axis ( $V_{41}$  and  $V_{42}$ ).

In order to return to the original coordinate system, one should perform the inverse transformations:

$$\mathbf{Y}_k = \mathbf{V}_k \mathbf{L} + \mathbf{V}_1, \quad (10)$$

where  $\mathbf{L} = \mathbf{R}_{Z2}^T \mathbf{R}_{X1}^T$  for the  $X$ -axis;  $\mathbf{L} = \mathbf{R}_{X2}^T \mathbf{R}_{Y1}^T$  for the  $Y$ -axis;  $\mathbf{R} = \mathbf{R}_{Y2}^T \mathbf{R}_{Z1}^T$  for the  $Z$ -axis.

An obvious drawback of the developed node-positioning algorithm is the need to solve the quadratic equation, which leads to 2 possible coordinates,  $[x_{41} \ y_{41} \ z_{41}]$  and  $[x_{42} \ y_{42} \ z_{42}]$ , and makes impossible the localization of next nodes in the network, since the number of possible positions in 3D space grows exponentially with the number of nodes, resulting in 1024 possible locations for the 10th node.

This problem can be solved by using one more node,  $V_5$ , with known coordinates and interacting with nodes  $V_1 \dots V_4$ .

Substitution of one of nodes  $V_1 \dots V_3$  by node  $V_5$  as a tetrahedron vertex leads to solutions  $[x_{43} \ y_{43} \ z_{43}]$ ,  $[x_{44} \ y_{44} \ z_{44}]$ .

Since one of the solutions is  $[x_{43} \ y_{43} \ z_{43}] = [x_{41} \ y_{41} \ z_{41}]$ , this gives us the actual position of  $V_4$  in 3D space. With the ability to build 3 tetrahedrons with bases  $V_1 V_3 V_5$ ,  $V_1 V_2 V_5$ ,  $V_2 V_3 V_5$ , we can determine the coordinates of node  $V_4$ , even in the presence of interference, introducing errors in the calculation of the distances between nodes. Positioning of the rest of the nodes in the network is performed according to the algorithm described above.

#### IV. FUTURE WORK

This paper attempts to determine the position of the nodes in the three-dimensional space, based on the presence of redundant links between network nodes according to the signal level.

The described above algorithm provides the ideal conditions for the transfer, but in practice this is not true.

Arriving at the receiver input signal undergoes multipath propagation, fading in the wireless channel it depends on many factors, in particular weather conditions.

Given that the channel parameters between any network nodes are not known (because they are unknown position) and the route between them, therefore, the algorithm needs to be modified using the adaptive signal processing techniques. We should also consider the case where all the check nodes are in the same plane, which results in two positions with respect to the ground node.

#### V. CONCLUSIONS

This line of research is relevant because wireless sensor networks have a number of advantages over previous-generation communication networks, the most important of which are the self-organization and the possibility of their use for the data transmission in places where the use of the wired networks is not possible.

FSU models that are discussed in various studies are often applied in nature and, accordingly, only some of the factors that influence those or other characteristics of a single network model are taken into account.

All these facts emphasize the necessity of development of the new algorithms of sensor nodes position definition considering as the saved-up experience, and perhaps new parameters once again.

#### ACKNOWLEDGMENT

The reported study was supported by RFBR, research project No15 07-09431a "Development of the principles of construction and methods of self-organization for Flying Ubiquitous Sensor Networks".

#### REFERENCES

- [1] W. Heinzelman, A. Chandrakasan, H. Balakrishnan. Energy-efficient communication protocol for wireless microsensor networks. Proceedings 33rd Hawaii International Conference on System Sciences (HICSS), Wailea Maui, Hawaii, USA, Jan. 2000.
- [2] A. Koucheryavy, A. Salim. Cluster head selection for homogeneous Wireless Sensor Networks. Proceedings, International Conference on Advanced Communication Technology, 2009. ICACT 2009. Phoenix Park, Korea.
- [3] D. Kim and Y. Chung. Self-Organization Routing Protocol Supporting Mobile Nodes for Wireless Sensor Network. Proceedings of the First International Multi-Symposiums on Computer and Computational Sciences, Volume 2, 2006.
- [4] Koucheryavy, A. Salim. Prediction-based Clustering Algorithm for Mobile Wireless Sensor Networks. Proceedings, International Conference on Advanced Communication Technology, 2010. ICACT 2010. Phoenix Park, Korea.
- [5] N. Al-Qadami, I. Laila, A. Koucheryavy, A. Saker Ahmad. Mobility Adaptive Clustering Algorithm for Wireless Sensor Networks with Mobile Nodes. Proceedings, International Conference on Advanced Communication Technology, 2015. ICACT 2015, Phoenix Park, Korea.
- [6] N.Attarzadeh, M.Mehrani. A New Three Dimensional Clustering Method for Wireless Sensor Networks. Global Journal of Computer Science and Technology. V.11, issue 6, version 1.0, April 2011.
- [7] P. Abakumov, A. Koucheryavy. The Cluster Head Selection Algorithm in the 3D USN. Proceedings, International Conference on Advanced Communication Technology, 2014. ICACT 2014. Phoenix Park, Korea.
- [8] P. Abakumov, A. Koucheryavy. Clustering Algorithm for 3D Wireless Mobile Sensor Network. The 15th International Conference on Internet of Things, Smart Spaces, and Next Generation Networks and Systems. NEW2AN 2015. LNCS, Springer, Heidelberg, – 2015.
- [9] A.Futahi, A.Koucheryavy, A.Paramonov, A.Prokopiev. Ubiquitous Sensor Networks in the Heterogeneous LTE Network. Proceedings,


- International Conference on Advanced Communication Technology, 2015. ICACT 2015, Phoenix Park, Korea.
- [10] A.Koucheryvy, A.Vladyko, R.Kirichek. State of the Art and Research Challenges for Public Flying Ubiquitous Sensor Networks. The 15th International Conference on Internet of Things, Smart Spaces, and Next Generation Networks and Systems. NEW2AN 2015. LNCS 9247, Springer, Heidelberg, 2015.
- [11] R.Kirichek, A.Paramonov, A.Koucheryavy. Flying Ubiquitous Sensor Networks as a Quening System. Proceedings, International Conference on Advanced Communication Technology, 2015. ICACT 2015, Phoenix Park, Korea.
- [12] E.Pignaton de Freitas. Biologically-Inspired Solutions for Wireless Sensor Networks. ICUMT 2012. Key Note Speech. St.Petersburg, October, 2012.




**Dr. Ruslan Kirichek** working in St.Petersburg University of Telecommunication as Associate Professor Department of Communications Networks. He was born in 1982 in Tartu (Estonia). He graduated Military-Space Academy A.F. Mozhaiskogo and St.Petersburg University of Telecommunication in 2004 and 2007 respectively. R.Kirichek received Ph.D from St.Petersburg University of Telecommunication in 2012. Since 2004 he worked at IT-department of the Air Force as a senior engineer. Since 2008 worked as a senior researcher at the Federal State Unitary Enterprise "Center-Inform". Supervised research testing communication networks in terms of destructive influences. Since 2012 worked as the Head of the Internet of Things Laboratory at St.Petersburg University of Telecommunication.



**Dr. Ilya Grishin** working in St.Petersburg State University of telecommunications at department of communication networks and data transmission. He was born in St. Petersburg in 1980. He graduated from the St. Petersburg university of telecommunications in 2003. I.Grishin received Ph.D from St.Petersburg University of Telecommunication in 2009. From 2003 to 2009 worked as senior lecturer in SUT. From 2009 works as the associate professor of communication networks and data transmission. Area of scientific interests is adaptive processing.



**Darina Okuneva** working in St.Petersburg State University of telecommunications at department of Program engineering and computer facilities. She was born in St. Petersburg in 1985. She graduated from the St. Petersburg university of telecommunications in 2007. From 2005 to 2007 she was engaged in design of automated control systems in the Radiotelekom scientific and production enterprise. Since 2007 I worked as the programmer in the Software Missile Defence House company. Since 2012 to the present studies in postgraduate study of St. Petersburg State University of telecommunications. Now she is engaged researches in the field of wireless sensor networks.



**Mikhail Falin** received the B.S. in Information systems and technologies from the Moscow institute of radio electronics and automatic equipment in 2007. Since 2014 is the undergraduate of ITMO University in the Geoinformation systems. Her research interests include Geoinformation systems and sensor networks.